

GT Fixing Lug

Unit 4203 Oakfield Close, Tewkesbury Business Park, Tewkesbury, Glos GL20 8PF

T: 01684 290944

E: sales@gtwindowproducts.co.uk
W: www.gtwindowproducts.co.uk

GT Fixing Lug is manufactured using galvanised steel that is pretreated.

There are over 38 designs available in three main sizes 150mm, 202mm and 265mm. Shorter fixing lugs are available for check-reveal fixing.


The 265mm range will assist installers to comply with Building Regulations with regard to wider cavities.

It is recommended that all fixing lugs are secured to the interior walls of the building into solid ground, avoiding mortar joints, brick or block edges.

Use appropriate fixings which may be subject to the requirements of a structural engineer.

Some of the Lug- Fix designs can be fitted to either the front of the outer frame or the rear of the outer frame as shown here.

Secure with a fixing at these points

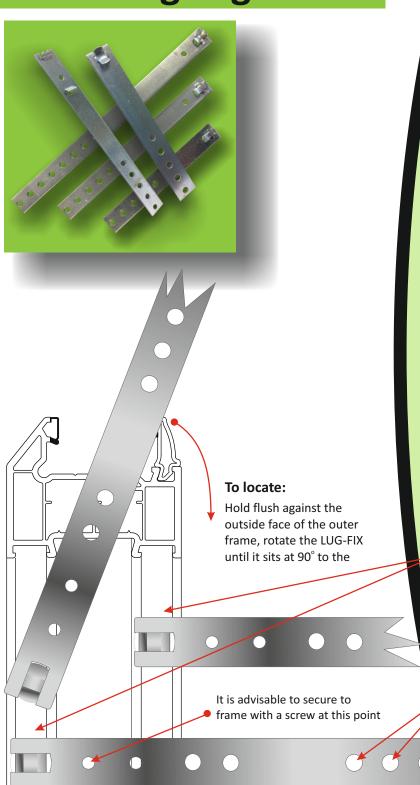

All drawings are not to scale.
Other designs may have different fixing hole positions.

